



Smart connections.

Data sheet

PLENTICORE plus

plus

PLENTICORE plus: The new standard – versatile and smart

All-in-one

PV hybrid inverter with battery input with optional disconnection

Compatibility with various high-voltage batteries

3 MPP trackers suited to the layout of almost all roofs

Extended MPP range – perfect for repowering

Smart connected

Smart Communication Board – future-proof and new functions can be added via the app

Display, data logger, system monitoring, network and control interfaces integrated as standard, WLAN Ready via external USB WLAN adapter¹⁾

Free Solar Portal for monitoring the PV system

EEBus and Sunspec for Smart Home integration

Smart performance

Fast, self-learning shadow management – adapts individually to the installation site

Dynamic active power control and 24-hour home-consumption measurement

Self-learning generation and consumption forecast – for optimum self-consumption

Low conversion losses due to DC coupling and high-voltage battery

Prepared for additional battery charge via AC energy sources

Easy to install


Simple device configuration using commissioning wizard

Safe installation due to clearly arranged, separate terminal compartment and protected power electronics

Auto update and remote support¹⁾



PLENTICORE plus: compact and rapidly deployable

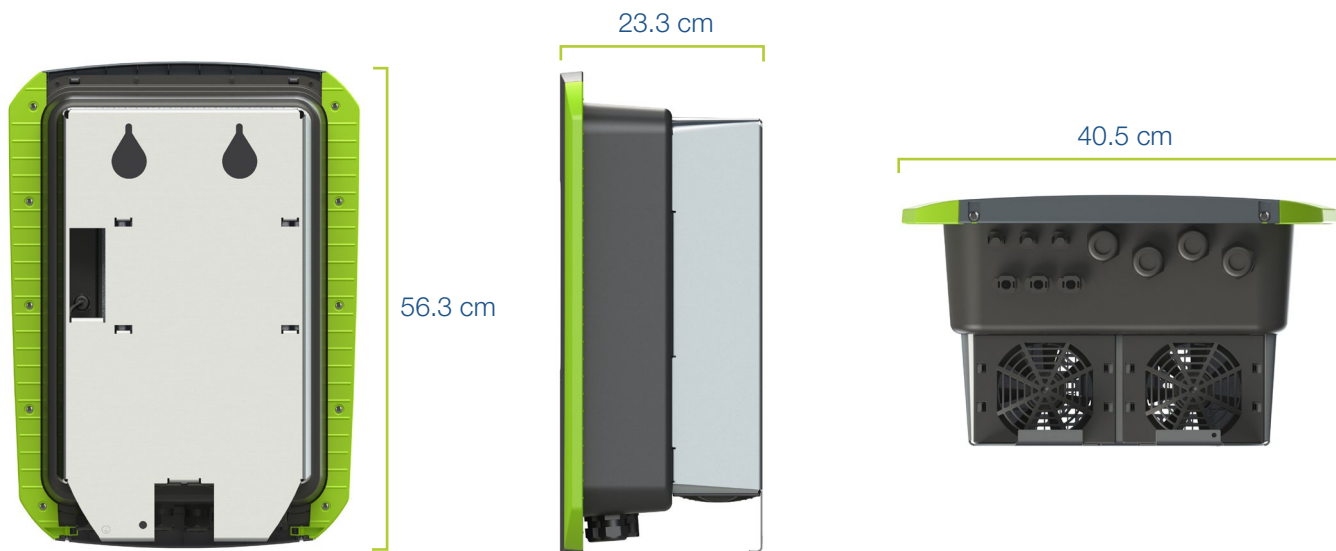

¹⁾ Available later on via software update

Technical data PLENTICORE plus

Power class		4.2	5.5	7.0	8.5	10	
DC 1 - 3							
Input side (DC)	Max. PV power (cos $\varphi = 1$)	kWp	4.83	6.33	8.05	9.78	11.50
	Nominal DC power	kW	4.33	5.67	7.22	8.76	10.31
	Rated input voltage ($U_{DC,r}$)	V	570				
	Start-up input voltage ($U_{DCstart}$)	V	150				
	Input voltage range ($U_{DCmin} - U_{DCmax}$)	V	120...1000				
	MPP range at rated output in single-tracker operation ($U_{MPPmin} - U_{MPPmax}$)	V	350...720 ³⁾	450...720 ³⁾	-	-	-
	MPP range at rated output in two-tracker operation ($U_{MPPmin} - U_{MPPmax}$)	V	180...720 ³⁾	225...720 ³⁾	290...720 ³⁾	345...720 ³⁾	405...720 ³⁾
	MPP range at rated output in three-tracker operation ($U_{MPPmin} - U_{MPPmax}$)	V	140...720 ³⁾	160...720 ³⁾	195...720 ³⁾	230...720 ³⁾	275...720 ³⁾
	MPP working voltage range ($U_{MPPworkmin} - U_{MPPworkmax}$)	V	120...720 ³⁾				
	Max. working voltage ($U_{DCworkmax}$)	V	900				
	Max. input current (I_{DCmax}) per DC input	A	13				
	Max. PV short-circuit current ($I_{SC,PV}$) per DC input	A	16.25				
	Number of DC inputs		3				
	Number of combined DC inputs (PV or battery)		1				
	Number of independent MPP trackers		3				
	DC 3 – battery input optional						
Min. working voltage for battery input ($U_{DCworkbatmin}$)	V	120 ³⁾					
Max. working voltage for battery input ($U_{DCworkbatmax}$)	V	500					
Max. charging current/discharging current at battery input	A	13/13					
Output side (AC)	Rated power, cos $\varphi = 1$ ($P_{AC,r}$)	kW	4.2	5.5	7.0	8.5	10
	Max. apparent output power, cos φ_{adj}	kVA	4.2	5.5	7.0	8.5	10
	Min. output voltage (U_{ACmin})	V	320				
	Max. output voltage (U_{ACmax})	V	460				
	Rated output current ($I_{AC,r}$)	A	6.06	7.94	10.10	12.27	14.43
	Max. output current (I_{ACmax})	A	6.74	8.82	11.23	13.63	16.04
	Short-circuit current (peak/RMS)	A	9.5/6.7	12.5/8.8	15.9/11.2	19.3/13.6	22.8/16.1
	Grid connection		3N~, 400V, 50 Hz				
	Rated frequency (f_r)	Hz	50				
	Min/max grid frequency (f_{min}/f_{max})	Hz	47/52.5				
	Setting range of the power factor (cos $\varphi_{AC,r}$)		0.8...1...0.8				
	Power factor for rated power (cos $\varphi_{AC,r}$)		1				
	Max. THD	%	3				
Standby/standby incl. 24h home-consumption measurement	W	4.5/7.9					
η	Max. efficiency	%	97.1	97.1	97.2	97.2	97.2
	European efficiency	%	96.2	96.2	96.5	96.5	96.5
	MPP adjustment efficiency	%	99.9	99.9	99.9	99.9	99.9

	Power class		4.2	5.5	7.0	8.5	10		
System data	Topology: Without galvanic isolation – transformerless	kWp	✓						
	Protection class according to IEC 60529		IP 55						
	Protective class according to IEC 62103		I						
	Overvoltage category according to IEC 60664-1, input side (PV generator)		II						
	Overvoltage category according to IEC 60664-1, output side (grid connection)		III						
	Degree of contamination		4						
	Environmental category (outdoor installation)		✓						
	Environmental category (indoor installation)		✓						
	UV resistance		✓						
	AC cable diameter (min-max)	mm	8...17						
	AC cable cross-section (min-max)	mm ²	1.5...6	2.5...6			4...6		
	DC cable cross-section (min-max)	mm ²	2.5...6						
	Max. fuse protection on output side		B16/C16				B25/C25		
	Internal operator protection according to EN 62109-2		RCCB type B						
	Independent disconnection device according to VDE 0126-1-1		✓						
	Height/width/depth	mm (in)	563/405/233 (22.17/15.94/9.17)						
	Weight	kg (lb)	20 (44.09)	22 (48.50)					
	Cooling principle – regulated fans		✓						
	Max. air throughput	m ³ /h	184						
	Max. noise emission	dB(A)	42	42	42	42	42		
Ambient temperature	°C (°F)	-20...60 (-4...140)							
Max. installation altitude above sea level	m (ft)	2000 (6562)							
Relative humidity	%	4...100							
Connection technology, DC side		SUNCLIX plug							
Connection technology, AC side		Spring-type terminal strip							
Interfaces	Ethernet LAN (RJ45)		1						
	Connection of energy meter for collecting energy data (Modbus RTU)		1						
	Digital inputs (e.g. for digital ripple control receiver)		4						
	USB 2.0		1						
	Potential-free contact for self-consumption control		1						
	Webserver (user interface)		✓						
	Warranty ¹⁾	Years	5 (2)						
Optional warranty extension for (years)		5/10/15							
Directives/Certification ²⁾		CE, GS, EN 62109-1, EN 62109-2, EN 60529, IEC 61683, CEI 0-21, EN 50438*, G83/2, IEC 61727, IEC 62116, RD 1699, TOR D4, UNE 206006 IN, UNE 206007-1 IN, UNE 217001 IN, UTE C15-712-1, VDE 0126-1-1, VDE-AR-N 4105							

Subject to technical changes. Errors excepted. You can find current information at www.kostal-solar-electric.com. Manufacturer: KOSTAL Industrie Elektrik GmbH, Hagen, Germany

¹⁾ 5-year warranty only after registration in the KOSTAL Solar online shop

²⁾ Does not apply to all national annexes to EN 50438


³⁾ MPP range of 120 V...180 V (with limited current of 9.5-13 A), MPP range of 680 V...720 V (with limited current of 11 A). Detailed layout can be seen in KOSTAL (PIKO) Solar Plan.

PLENTICORE plus available in 5 power classes




- 4.2
- 5.5
- 7.0
- 8.5
- 10


PLENTICORE plus 4.2

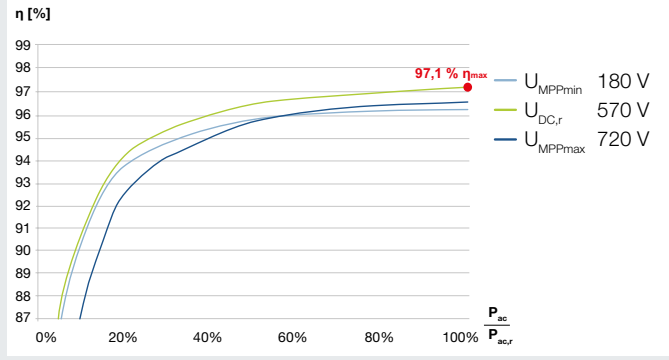


PLENTICORE plus 5.5

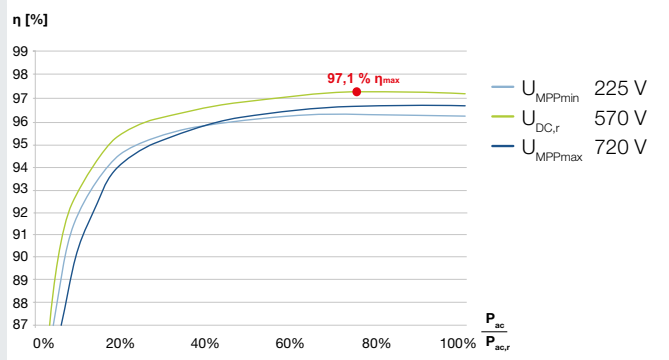


PLENTICORE plus 7.0

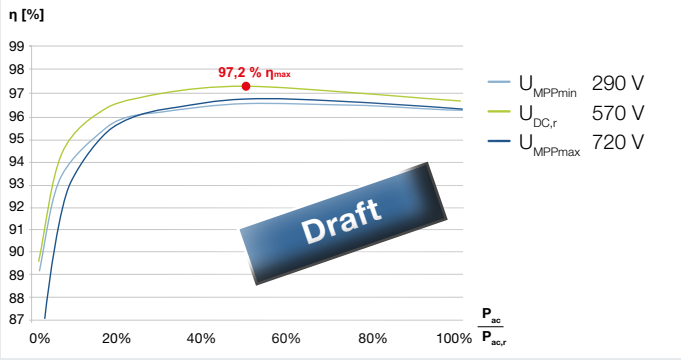

PLENTICORE plus 8.5

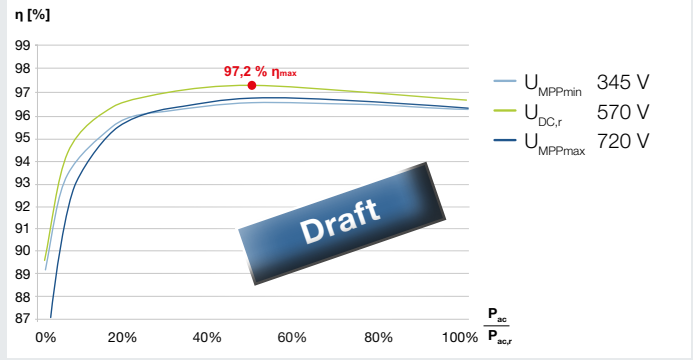

PLENTICORE plus 10

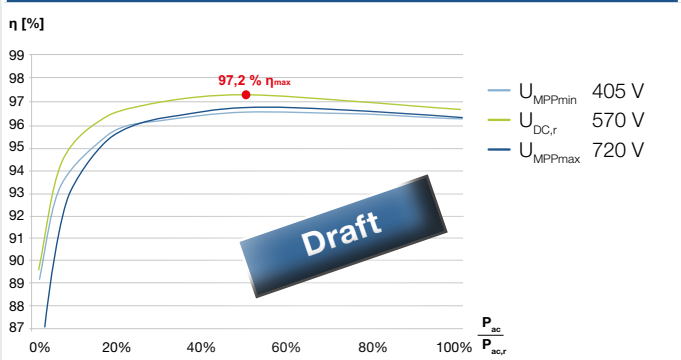

Services for our products

FAQs:
kostal-solar-electric.com/Service_Support

Product registration, warranty extension or purchase of accessories: shop.kostal-solar-electric.com

Get in touch: service@kostal-solar-electric.com

KOSTAL

Contact

KOSTAL Solar Electric GmbH
Hanferstr. 6
79108 Freiburg i. Br.
Germany

Tel.: +49 761 47744 - 100

Fax: +49 761 47744 - 111

www.kostal-solar-electric.com

